

Data Sheet

Top Entry Kit

Introduction

Top Entry Kits are used for when the secondary pipework is fed back into the ceiling void. Stand off brackets create a space behind the HIU that can be used to run pipes behind the HIU.

Depending on setup, they are supplied with 1, 2, 3 or 4 pipes and an option of a magnetic filter for the heating circuit.



Part Code	Description
HIAC13PACK	4 Pipe Top Entry Kit Inc Magnetic Filter (Includes 2 Stand off brackets, 4 Insulated Pipes, 2 Red MxM, 2 Blue MxM Ball Valves and Intakleen Nano Magnetic Filter)
HIACWBCONKIT	4 Pipe Top Entry Kit (Includes Stand off brackets, 4 Insulated Pipes, 2 Red MxM and 2 Blue MxM Ball Valves)
HIAC13CONKIT	3 Pipe Top Entry Kit (Includes Stand off brackets, 3 Insulated Pipes, 2 Red MxM and 1 Blue MxM Ball Valve)
HIAC14CONKIT	2 Pipe Top Entry Kit (Includes Stand off brackets, 2 Insulated Pipes, 1 Red MxM and 1 Blue MxM Ball Valve)
HIAC15CONKIT	1 Pipe Top Entry Kit (Includes Stand off brackets, 1 Insulated Pipe and 1 Red MxM)
HI2ACCON	4 Pipe Top Entry Kit Only (4 Insulated Pipes)
HI2ACBKT	Stand off Brackets Only

Fitting Instructions

- Fit the pipes to secondary ports at the bottom of the HIU.
- Attach the brackets using 4 x fixing screws to the back of the HIU in the matching fixing holes provided
- Hang the HIU to the wall mounting bracket
- Attach the "Top Entry Pipes" to the water feed




Dimensions

Stand-off Bracket



Top Entry Pipe

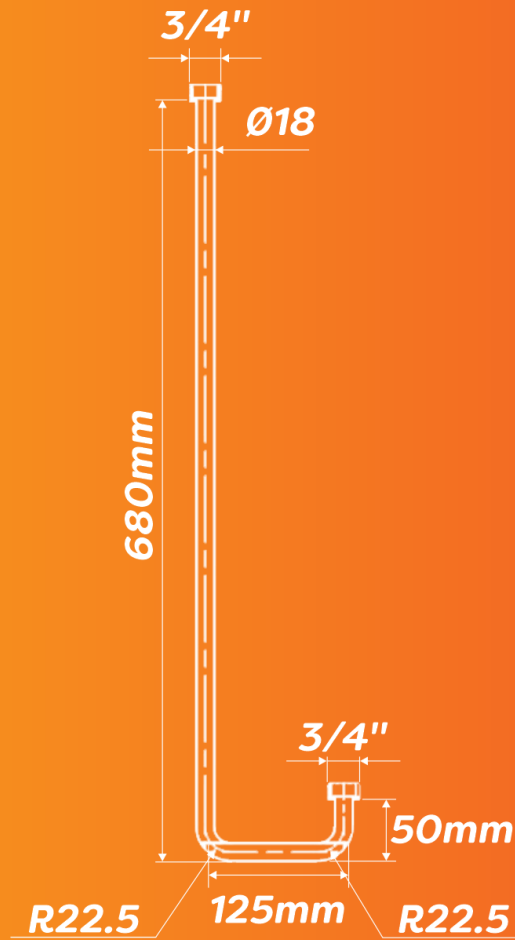

Top Entry Pipe with Insulation

